

## EVERPURE 4FT FILTER CARTRIDGE

### High Performance Filter Cartridge for Everpure FT Series



4FT Replacement Cartridge

#### Applications

- ◆ Coffee, Bubble Tea, Restaurants

#### Features • Benefits

- ◆ Suitable for applications with relatively complex and challenging water quality.
- ◆ Activated carbon fibre filter cartridge, with large specific surface area, high dirt holding capacity and minimal pressure drop.
- ◆ Effectively removes chlorine, taste & odour.
- ◆ High flow rate and capacity, longer lifespan, lower operation and maintenance costs.

#### Installation tips

- ◆ Install vertically so cartridge hangs down
- ◆ Allow at least 64mm clearance below the cartridge for easy cartridge replacement and system maintenance
- ◆ Resume inlet water supply and flush the whole filtration system for at least 5 minutes after a filter cartridge is installed or replaced

#### Operation tips


- ◆ Recommended service life of the cartridge: 6 - 12 months
- ◆ The service life is a recommended replacement cycle, and the actual lifespan of a cartridge may vary in accordance with the actual water consumption and local tap water quality
- ◆ Change a cartridge when capacity is reached or when pressure falls below 10psi (0.7bar)
- ◆ Always flush the filter cartridge at time of installation and cartridge change.

#### Sizing

- ◆ Flow rate<sup>1</sup>: 2.5 gpm (9.5 Lpm)
- ◆ Rated capacity<sup>1</sup>: 20,000 gallons (75,700 L)

<sup>1</sup>Tested in Pentair laboratory according to NSF-42 standard and verified by third party laboratory.

# EVERPURE 4FT FILTER CARTRIDGE - SA21049 (1PK)

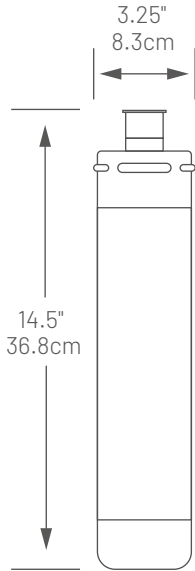

## Specifications

- ◆ **Flow rate<sup>1</sup>**  
2.5 gpm (9.5 Lpm)
- ◆ **Rated capacity<sup>1</sup>**  
20,000 gallons (75,700 L)
- ◆ **Working pressure**  
10~125psi, non-shock (0.7~8.6 bar)
- ◆ **Temperature**  
35~100°F (2~38°C)
- ◆ **Overall dimension**  
14.5"H\*3.25"D (36.8cm\*8.3cm)

## Note

- ◆ Do not use with microbiologically unsafe or of unknown quality water without adequate disinfection before or after the filtration system/ cartridge.
- ◆ After stopping the filtration for 48 hours, it is recommended to flush for 10mins before use.



## Pentair Offices in South East Asia

### Singapore

390 Havelock Road  
#04-01 King's Centre  
Singapore 169662  
Tel: +6567685900

### Thailand

16th Floor, The Ninth Towers  
Grand RAMA 9, Tower B  
33/4 Rama 9 Road, Huaykwang  
Bangkok 10310, Thailand  
Tel: +6621681092

### Philippines

5th Floor MAIA Suites  
1747 Nicanor Garcia Street corner  
D.Oliman Street Makati City, Philippines  
Tel: +632824 3825

All indicated Pentair trademarks and logos are property of Pentair. Third party registered and unregistered trademarks and logos are the property of their respective owners.

©2023 Pentair. All Rights Reserved.