



RFF RESIDENTIAL AND RCFF COMMERCIAL FILTERS

PRODUCT FEATURES:

- Bobbin-wound reinforced fiberglass tank.
- UV-resistant surface finish.
- RFF residential models from $\varnothing 350\text{mm}$ to $\varnothing 800\text{mm}$.
- RCFF commercial models from $\varnothing 900\text{mm}$ to $\varnothing 1400\text{mm}$.
- Max. Operating Pressure: 2.5bar (36psi). Models from RCFF900 and up are available in 4 bar upon request.
- Max Temperature of 43°C (109°F).
- Suggested Size of Media: 0.5-0.8mm.




RFF RESIDENTIAL AND RCFF COMMERCIAL FILTERS

Six-position Hi-Flow™ Valve provides easy control of all filter functions:

- Filter
- Backwash
- Rinse
- Waste
- Closed
- Recirculate

One-piece fiberglass-reinforced tank with UV-resistant surface finish for years of service and exceptional strength

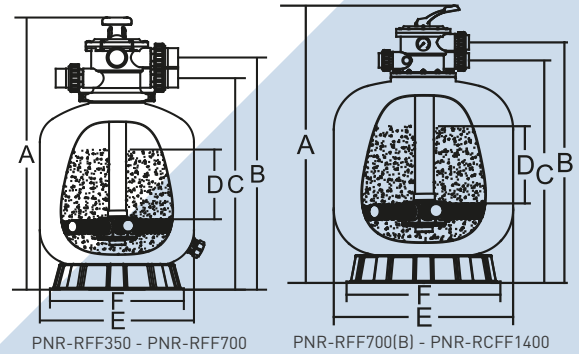

PNR-RFF350 - PNR-RFF700

PNR-RFF700(B) - PNR-RCFF1400

Filter Model	Filter Area m ²	Valve Connections		Flow Rate		Sand kg	Product Dimensions					
		inch	mm	lpm	m ³ /h		A mm	B mm	C mm	D mm	E mm	F mm
PNR-RFF350	0.09	1.5	50	72	4.32	20	726	619	550	160	355	298
PNR-RFF400	0.13	1.5	50	108	6.48	35	757	640	590	175	410	390
PNR-RFF450	0.16	1.5	50	135	8.10	45	814	698	638	210	455	390
PNR-RFF500	0.22	1.5	50	185	11.10	85	845	730	670	235	535	500
PNR-RFF650	0.32	1.5	50	260	15.60	145	950	815	775	300	635	500
PNR-RFF650B	0.32	2.0	50	267	16.00	145	957	835	731	300	635	500
PNR-RFFV700	0.40	1.5	50	325	19.50	210	1020	905	845	330	710	500
PNR-RFF700B	0.41	2.0	63	336	20.16	215	1092	960	877	390	723	500
PNR-RFF800	0.50	2.0	63	415	24.90	355	1200	1085	1002	425	800	780
PNR-RCFF900	0.64	2.0	63	520	31.20	470	1300	1172	1090	480	900	780
PNR-RCFF900C	0.64	2.5	75	533	32.00	470	1334	1242	990	480	900	780
PNR-RCFF1000	0.79	2.0	63	650	39.00	620	1400	1340	1260	580	1000	780
PNR-RCFF1000C	0.79	2.5	75	658	39.50	620	1434	1410	1160	580	1000	780
PNR-RCFF1200	1.13	2.0	63	860	51.60	860	1600	1550	1468	740	1200	1000
PNR-RCFF1200C	1.13	2.5	75	941	56.50	860	1634	1620	1368	740	1200	1000
PNR-RCFF1400	1.54	2.5	75	1155	69.30	1400	1845	1683	1586	750	1400	1000

*Operating pressure of 4 bar filters can be ordered from φ900-1400mm, please contact Pentair sales representative for more details.



19F, Cloud Nine Plaza No.1118, West Yan'an Road, Shanghai, 200052, China

390 Havelock Road, #04-01 King's Center, Singapore 169662
+65 6768 5800

33/4 The Ninth Towers Grand RAMA 9 (Tower B) 16th Floor, Rama 9 Road, Huaykwang, Bangkok, Thailand 10310
+66 27178153

All Pentair trademarks and logos are owned by Pentair, Inc. Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice. Pentair is an equal opportunity employer.