

# OPTIONAL KITS:

## FLOW SWITCH

Water sensor. Automatically shut the chlorinator off when there is no water in the system


PNR-FW-RES: for PNR-CHLOR model

PNR-FW-COM: for PNR-COM model

## PANELS:

**Plug & Play panels for easy installation:**

- PNR-PHORP-PANEL:  
includes pre-filter, pH and OPR probes, probe holder and dosing pump
- PNR-PHCL-PANEL:  
Includes pre-filter, pH and  
Free Chlorine probes, probe holder and dosing pump

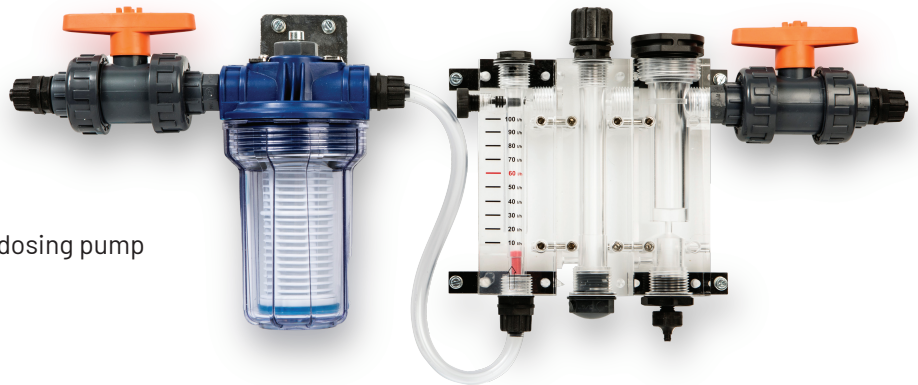

## PROBES

Optional probes with probe holder

- PNR-PH-RES: pH for residential applications
- PNR-PH-COM: pH for commercial applications
- PNR-ORP: measurement of Redox/ORP
- PNR-CL: measurement of free chlorine
- PNR-SALT: measurement of conductivity
- PNR-TEMP: measurement of water temperature



## DOSING PUMPS:

All dosing pump capacities, from 1.5L/h to 20L/h, with peristaltic or membrane technology



China | Singapore | Thailand | [pentair.com](http://pentair.com)

19F, Cloud Nine Plaza No.1118, West Yan'an Road, Shanghai, 200052, China

390 Havelock Road, #04-01 King's Center, Singapore 169662

33/4 The Ninth Towers Grand RAMA 9 (Tower B) 16th Floor, Rama 9 Road, Huaykwang, Bangkok, Thailand 10310

+86 21 52507883

+65 6768 5800

+662 1681092

Pentair reserves the right to change specifications without prior notice. Pentair is an equal opportunity employer. P1-108 10/18 ©2020 Pentair Water Pool and Spa, Inc. All rights reserved.





# OPTIONAL KITS

PNR-CHLOR and  
PNR-COM SALT CHLORINATORS

