

4FT-S FILTER CARTRIDGE

High Performance Filter Cartridge for Everpure FT Series



4FT-S Replacement Cartridge

APPLICATIONS

- ◆ Ice machines, steam and combi ovens, coffee, bubble tea, and restaurants

FEATURES • BENEFITS

- ◆ Uses anti-scaling materials which are internationally certified by WQA. No additives. Green and environmentally friendly
- ◆ Effectively removes chlorine taste and odour in water to enhance the taste of beverages
- ◆ Contains silver-loaded antibacterial formula with 0.5 micron filtration efficiency
- ◆ Quick-connect aluminum canister makes filter replacement quick and easy
- ◆ Compatible with Everpure water filtration system

INSTALLATION TIPS

- ◆ Install vertically so cartridge hangs down
- ◆ Allow at least 200mm clearance below the cartridge for easy cartridge replacement and system maintenance
- ◆ Resume inlet water supply and flush the whole filtration system for at least 30 minutes after a filter cartridge is installed or replaced

OPERATION TIPS


- ◆ Recommended service life of the cartridge: 6 - 12 months
- ◆ The service life is a recommended replacement cycle, and the actual lifespan of a cartridge may vary in accordance with the actual water consumption and local tap water quality
- ◆ Change a cartridge when capacity is reached or when pressure falls below 10psi (0.7bar)
- ◆ Always flush the filter cartridge at time of installation and cartridge change.

SIZING

- ◆ Flow rate¹: 2.5 gpm (9.5 Lpm)
- ◆ Rated capacity¹: 20,000 gallons (75,708 L)

4FT-S FILTER CARTRIDGE

SA21126 (1PK)

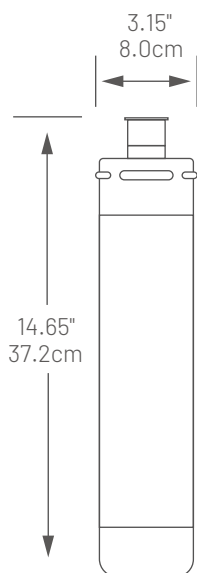

SPECIFICATIONS

Cartridge

Overall Dimensions

Length: 14.65" (37.2 cm)

Diameter: 3.15" (8.0 cm)

Working Pressure

0.14 – 0.35MPa, non-shock

Temperature

39 – 104°F (4 – 40°C)

Filter Media Type

Activated Carbon Fiber

Performance

Flow Rate¹

2.5 gpm (9.5 Lpm)

Rated Capacity¹

20,000 gallons (75,708 L)

NOTE

- ◆ Do not use with microbiologically unsafe or of unknown quality water without adequate disinfection before or after the filtration system/ cartridge.
- ◆ After stopping the filtration for 48 hours, it is recommended to flush for 10 mins before use.



Pentair Offices in South East Asia

Singapore

390 Havelock Road
#04-01 King's Centre
Singapore 169662
Tel: +6567685900

Thailand

16th Floor, The Ninth Towers
Grand RAMA 9, Tower B
33/4 Rama 9 Road, Huaykwang
Bangkok 10310, Thailand
Tel: +6621681092

sea.eneews@pentair.com | pentair.asia

All indicated Pentair trademarks and logos are property of Pentair. Third party registered and unregistered trademarks and logos are the property of their respective owners.
©2024 Pentair. All Rights Reserved.